


DAI MT CB H660 2560x700 T TN/TN SP60 PL 230/50

66509144

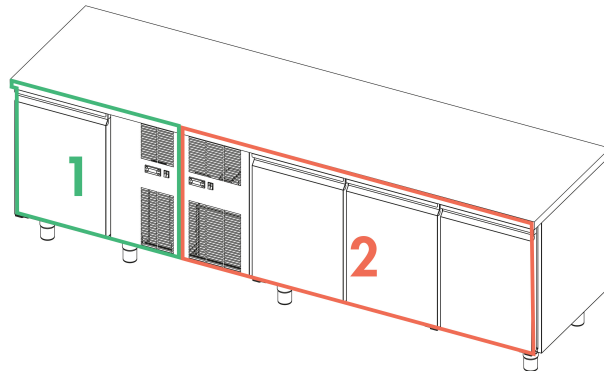

DIMENSIONS AND WEIGHTS

| |
|---|
| External dimensions in mm. (LxPxH): 2560x7600x850 |
| Net/gross weight in Kg.: 190/222 |
| Through-in door dimensions in mm. (LxP): 362x542 |
| Capacity (Liters): 120+270 |
| Packaging dimensions in mm. (LxPxH): 2700x720x1100 |
| Insulation thickness: 60 mm |

TECHNICAL FEATURES

| |
|---|
| Voltage: 230V / 50Hz / 1 |
| Defrosting: Automatic |
| Electronic temperature control device: Yes |
| Condensation discharge: Automatic |
| Construction materials: Stainless steel aisi 304 with external bottom on zinc plated steel and back on stainless steel aisi 430 |
| EVAPORATION RESISTANCE: / |
| DEFROSTING RESISTANCE: / |
| LIGHTING ABSORPTION: / |
| Freon (section 2): R290 |
| Refrigerant charge (section 2): 0,085 |
| Out put (Section 2): 335W |
| Absorption (Section 2): 272W / 1,61A |
| Freon (section 1): R290 |
| Refrigerant charge (section 1): 0,080 |
| Out put (Section 1): 335W |
| Absorption (Section 1): 242W / 1,53A |

GENERAL FEATURES

| |
|--|
| Refrigeration system : vetilata |
| Built-in motor: Yes |
| On castors: On demand |
| Lighting: No |
| Door with magnetic seal: Yes |
| Doors with return: Yes |
| Equipment grate: 4 x GN 1/1 |
| Working temperature (section 2): 0°/+8°C |
| Working temperature (section 1): 0°/+8°C |


ENERGETIC FEATURES

| |
|---|
| Climate class: 5 (40°C - 40%) |
| Typology: Horizontal Cabinet |
| Performance: High performance - This appliance is intended for use in ambient temperatures up to 40 ° C |
| Category (Section 1): Storage |
| Category (Section 2): Storage |
| Refrigeration Volume Vnref (L) (Section 2): 264 |
| Freezing Volume Vnfrz (L) (Section 2): - |
| Daily power consumption E24 h (Section 2): 1,44 |
| Annual absorption AEC KWh/Annum (Section 2): 526 |
| Refrigeration Volume Vnref (L) (Section 1): 88 |
| Freezing Volume Vnfrz (L) (Section 1): - |
| Daily power consumption E24 h (Section 1): 1,14 |
| Annual absorption AEC KWh/Annum (Section 1): 416 |
| IEE energy efficiency index: 20,65 |

STUDIO 54 SRL

Via Gian Lorenzo Bernini 147 - 35010 San Giorgio in Bosco PD
T +39 049 9450466 - F +39 0499451044 - Cod. fiscale e p.iva 00096970280 - R.E.A. n. 247856
www.studio-54.it info@studio-54.it

TECHNICAL DESIGN

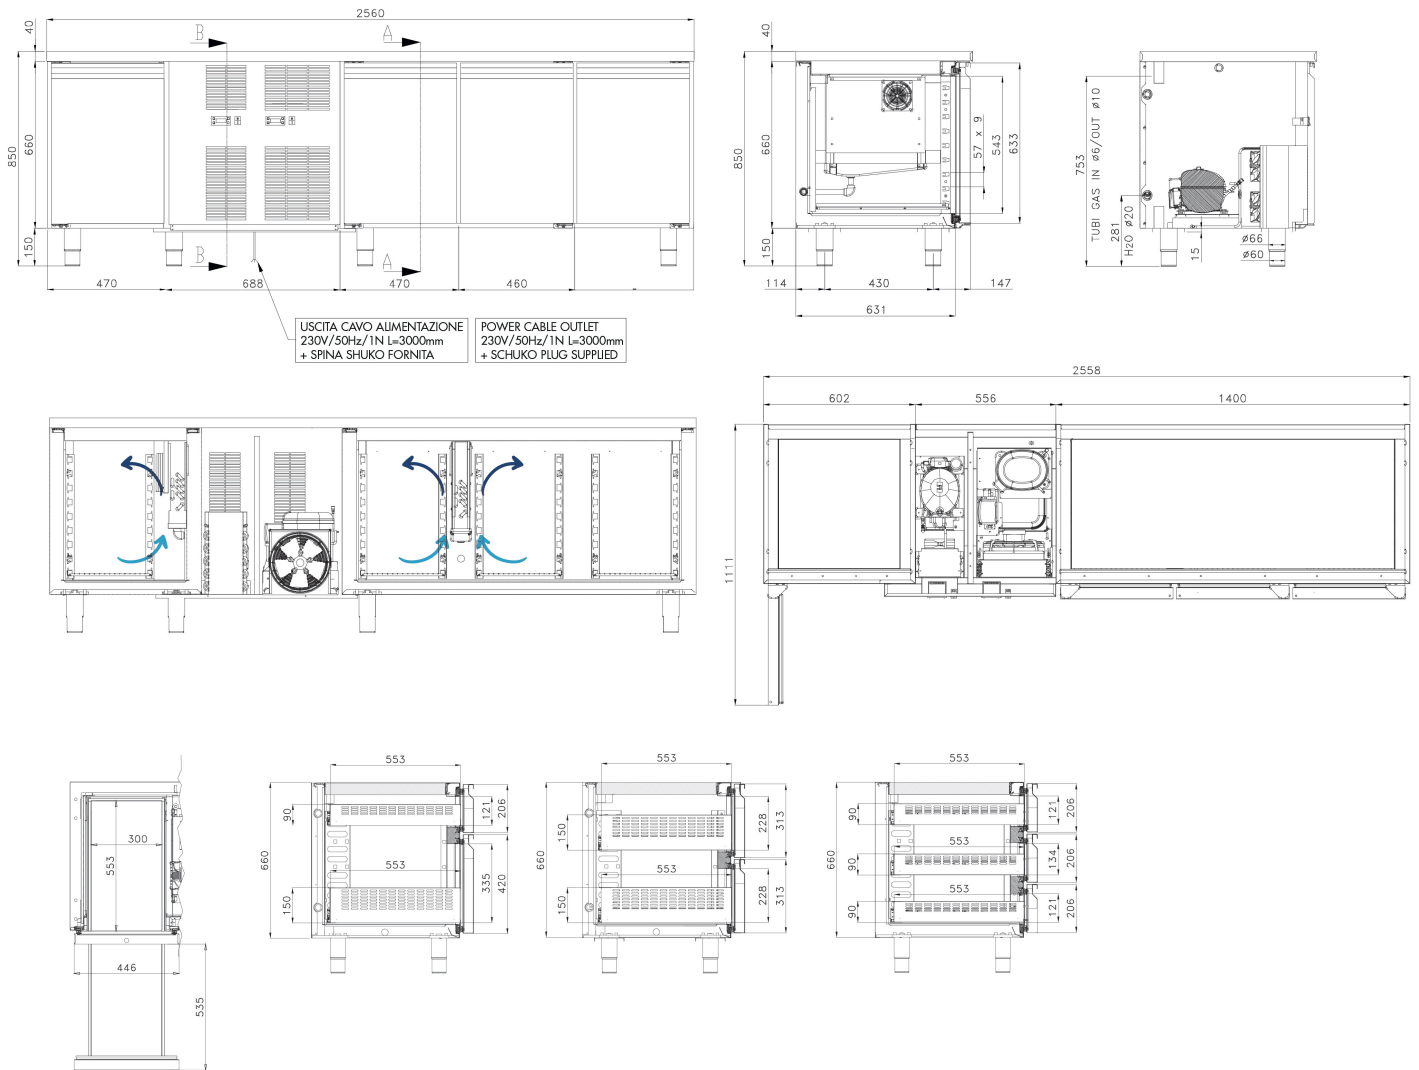

OPTIONAL

STUDIO 54 SRL

Via Gian Lorenzo Bernini 147 - 35010 San Giorgio in Bosco PD
 T +39 049 9450466 - F +39 0499451044 - Cod. fiscale e p.iva 00096970280 - R.E.A. n. 247856
 www.studio-54.it info@studio-54.it